REV.	DESCRIPTION	ECN NO.	DATE	DRAWER
A	New Release		12/04/2008	*Jeff*

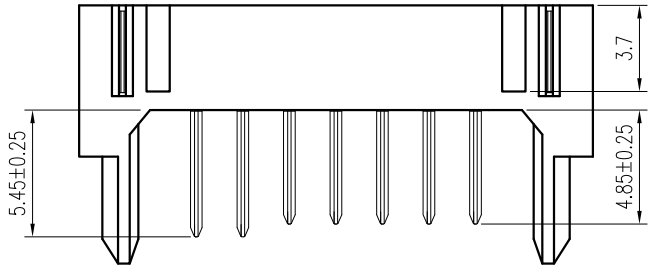

Notes:

1. Material :
   Housing : Thermoplastic UL 94V–0, Black
   Terminal : Copper Alloy
   Forklock : Copper Alloy
2. Finish :
   Terminal : Selected Gold on Contact Area, Gold Flash on Solder Tails, Both over 50u" Min. Ni Under–plated Overall
   Forklock : 50u" Min Tin over 50u" Min. Ni Under–plated Overall.
3. Recommended P.C.B. Thickness : 1.2 mm
4. Order Information :

T SA1–03707–36T X A

Plating

T : RoHS (for High Temperature)

2 : 2u" Min. Gold on Contact Area
3 : 5u" Min. Gold on Contact Area

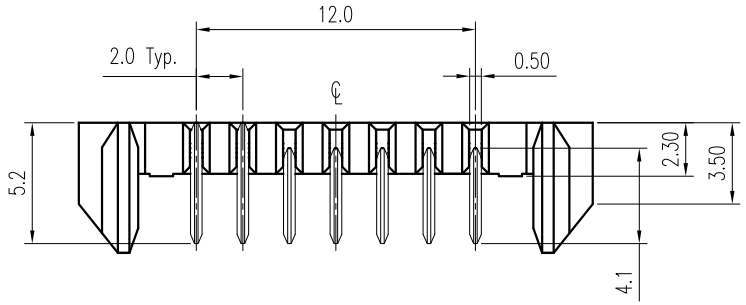

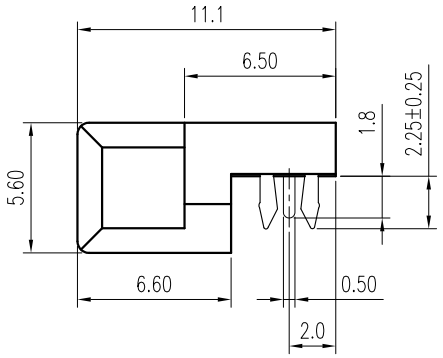

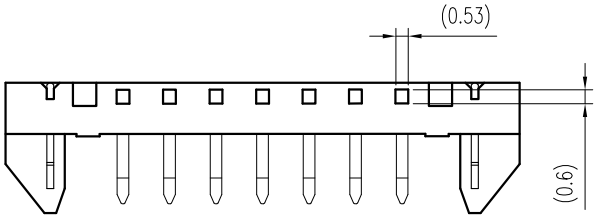

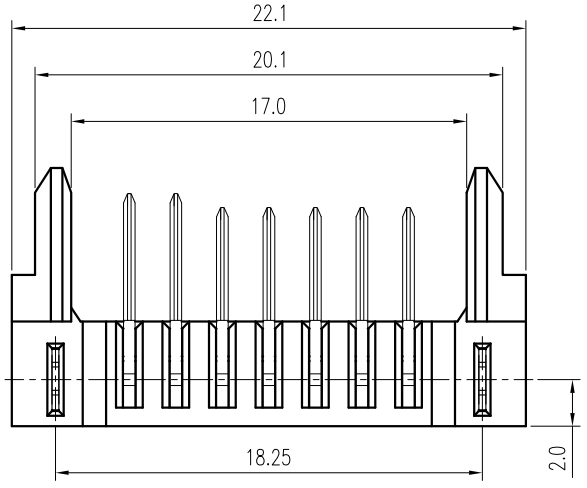

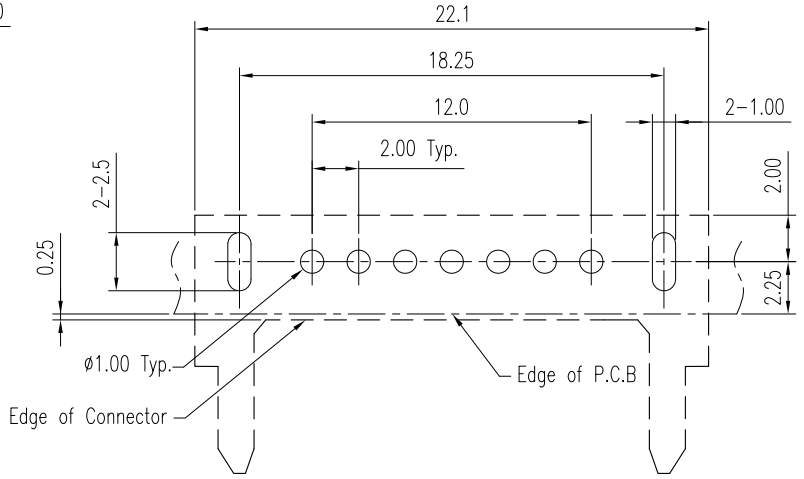

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

DIMENSION IN mm [inch]		CEN 欣訊科技股份有限公司 CEN LINK CO., LTD.	Title: 2.0mm Pitch Battery Conn. Male Type	
Tolerance unless otherwise specified				
X. ± 0.38	X.° ± 10°		Dwg No. TSA1–03707–36TXA	Scale: 3 : 1
X.X ± 0.25	X.X° ± 5°	CUSTOMER DRAWING	File No. P05016	Size: A 4
X.XX ± 0.15	X.XX° ± 2°	Approver: / Checker: / Drawer: *Jeff* 12/04/2008		Rev : A
X.XXX ±	X.XXX° ±			Sheet: 1 / 1

WC00–4B