

REV.	DESCRIPTION	ECN NO.	DATE	DRAWER
A	New Release		05/08/2008	Jeff

Notes:

- Material :
Housing : Thermoplastic UL 94V-0, Black
Terminal : Copper Alloy
- Finish :
Terminal : Selected Gold on Contact Area, Gold Flash on Solder Tails, Both over 50u" Min. Ni Under-plated Overall
- Order Information :

T SBO-092 X 5-01T X

T : RoHS (for High Temperature)

Plating






- 2 : 2u" Min. Gold on Contact Area
- 3 : 5u" Min. Gold on Contact Area
- 5 : 15u" Min. Gold on Contact Area
- 8 : 30u" Min. Gold on Contact Area

Amount of Pins

- 7 : 7 Pins
- 8 : 8 Pins

Dimension Information:

Part No.	Dim.	Dim.A	Dim.B	Dim.C	Dim.D
TSBO-09275-01TX		25.2	21.2	17.5	16.65
TSBO-09285-01TX		27.7	23.7	20.0	19.15

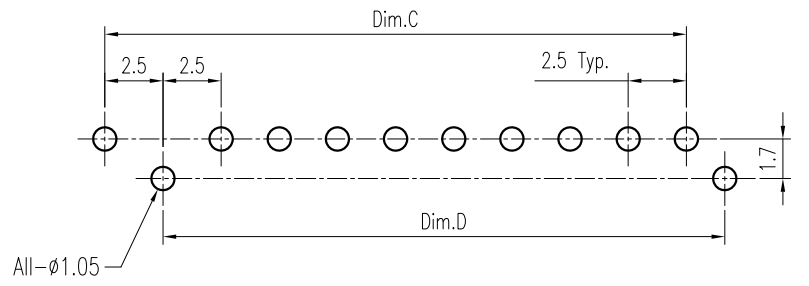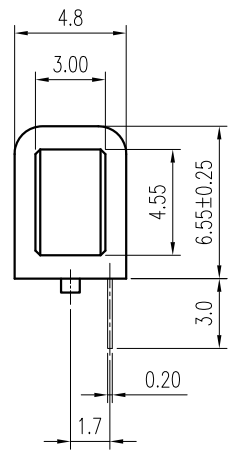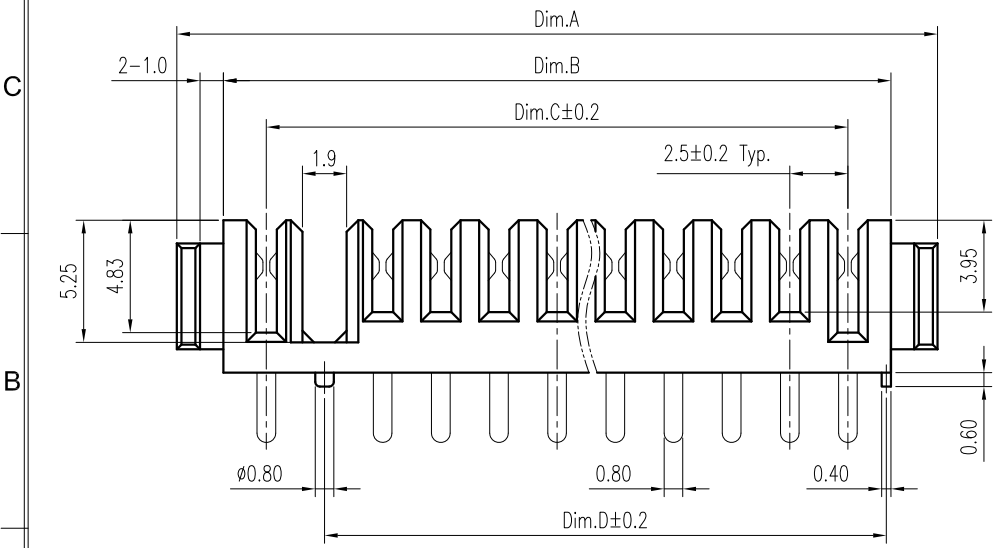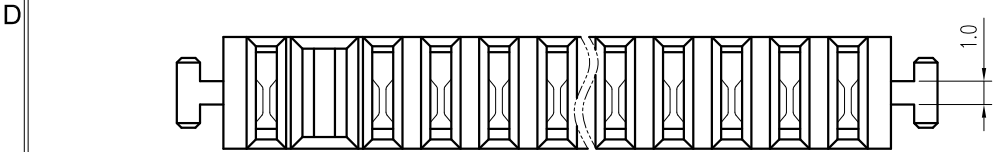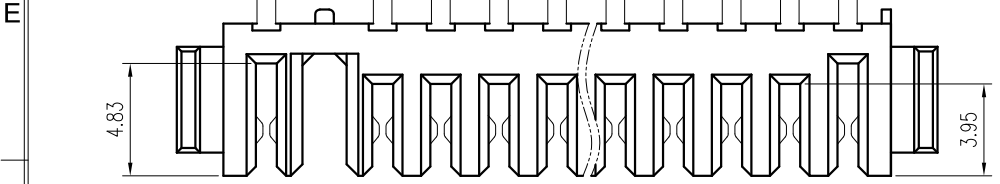

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

DIMENSION IN mm [inch]	
Tolerance unless otherwise specified	
X. ± 0.38	X.* ± 10'
X.X ± 0.25	X.X' ± 5'
X.XX ± 0.13	X.XX' ± 2'
X.XXX ±	X.XXX' ±

CEN 欣訊科技股份有限公司
CEN LINK CO., LTD.
CUSTOMER DRAWING

Title 2.5mm Pitch Battery Conn. Female Type
Dwg No. TSBO-092X5-01TX
File No. PO6010

Approver: _____ Checker: _____ Drawer: Jeff
05/08/2008

Scale: 3 : 1
Size: A 4
Rev: A
Sheet: 1 / 1