

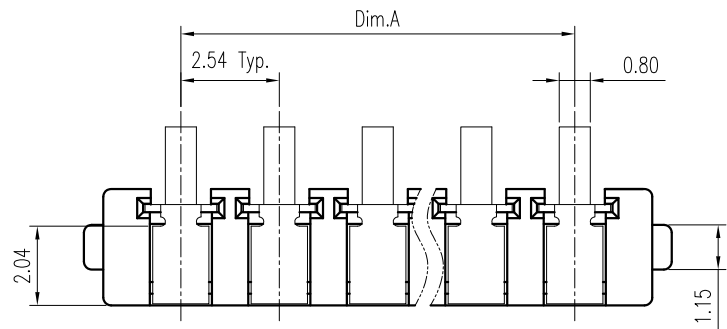


REV.	DESCRIPTION	ECN NO.	DATE	DRAWER
A	New Release		05/16/2008	Aaron
B	Modified Packing Option $\triangle_B$ x1	EC0805056	05/23/2008	Hyde




Dimension Information:

Part No.	Dim.	Amount of Pins	Dim.A	Dim.B
TSE0-01540-00XX	4	4	7.62	11.62
TSE0-01550-00XX	5	5	10.16	14.16
TSE0-01580-00XX	8	8	17.78	21.78
TSE0-01590-00XX	9	9	20.32	24.32


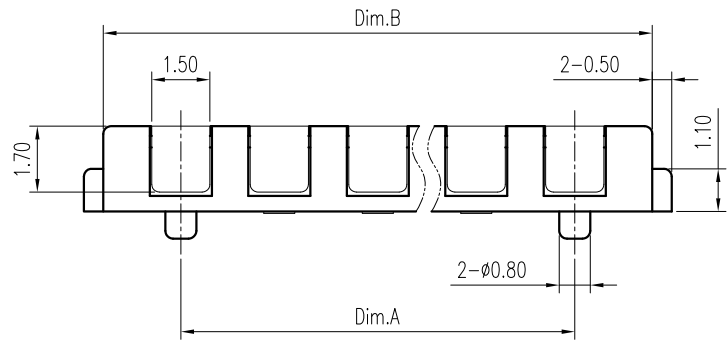


$\triangle_B$  Packing  
T : Tube  
1 : Tube + Cap

Plating  
1 : Gold Flash on Contact Area  
2 : 3u" Min. Gold Contact Area  
3 : 5u" Min. Gold Contact Area  
4 : 10u" Min. Gold Contact Area  
5 : 15u" Min. Gold Contact Area

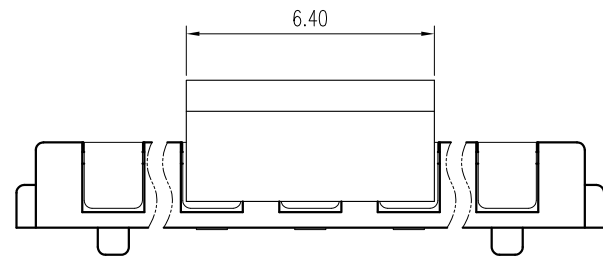

With Cap

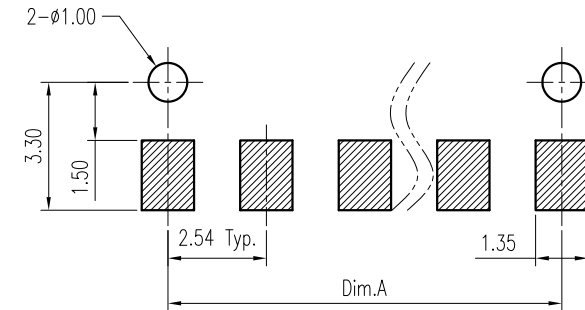

Recommended P.C.B. Layout  
Layout Tolerance =  $\pm 0.05$  mm

DIMENSION IN mm [inch]			
Tolerance unless otherwise specified			
X.	$\pm 0.38$	X.*	$\pm 10'$
X.X	$\pm 0.38$	X.X*	$\pm 5'$
X.XX	$\pm 0.25$	X.XX*	$\pm 2'$
X.XXX	$\pm 0.13$	X.XXX*	$\pm$

**CEN** 欣訊科技股份有限公司  
CEN LINK CO., LTD.  
CUSTOMER DRAWING

Title 2.54mm Pitch Battery Conn. Female Type  
Dwg No. TSE0-015X0-00XX  
File No. PO8005

Approver:

Checker:

Drawer: **Hyde**

05/23/2008

Scale: 5 : 1  
Size: A 4  
Rev : B  
Sheet: 1 / 1