



1.27mm FEMALE HEADER SMD TYPE SINGLE ROW BASE 3.4/4.3mm


ORDER INFORMATION

$\frac{X}{a}$ P90-0320 $\frac{X}{b}$ - $\frac{XX}{c}$ $\frac{T}{d}$ $\frac{1}{e}$



a=Y-RoHS
 Z-RoHS(for High Temperature)
 b=Type Option
 Housing Dim.H-3.6mm,4.5mm
 c=Amount of Pins:03~50-3~50Pins
 d=T-Tube
 e=1-G/F Overall




Type1

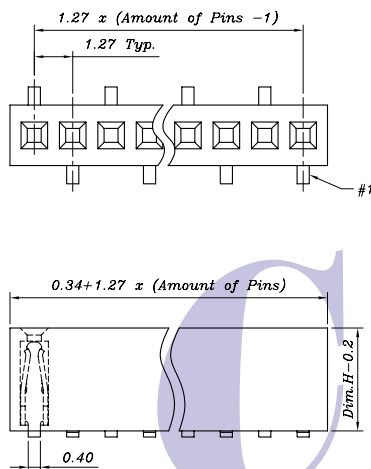

Type2

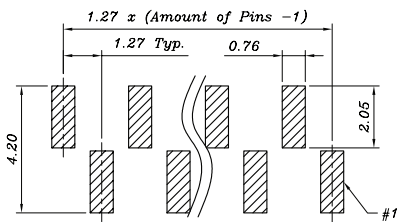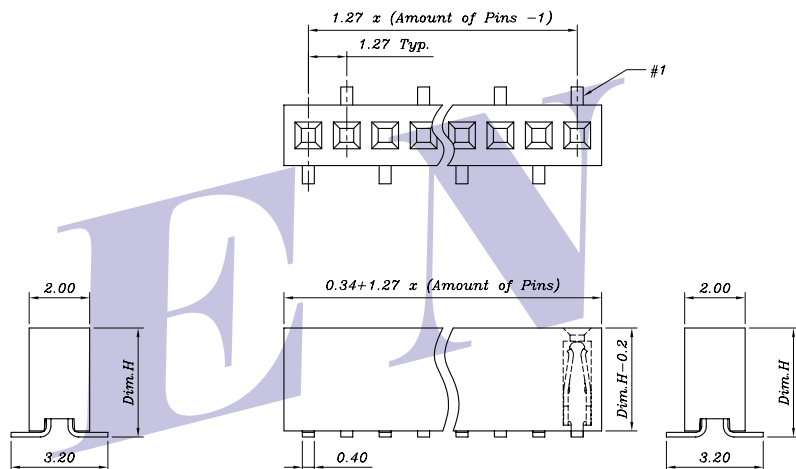

Recommended P.C.B. Layout
 Layout Tolerance = ± 0.05 mm

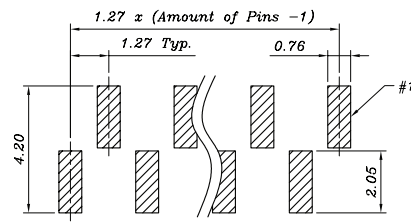

Recommended P.C.B. Layout
 Layout Tolerance = ± 0.05 mm

SPECIFICATION

Current Rating : 1A
 Contact Resistance : 20m ohm Max.
 Dielectric Withstanding : AC 500V
 Operating Temperature : -40° C ~ 105° C

Note: Due to technical progress, all design, specification and components are subject to change without notice