



2.0mm PIN HEADER R/A TYPE

ORDER INFORMATION

$\frac{X}{a}$ P91-02 $\frac{X}{b}$ 0 $\frac{X}{c}$ - $\frac{XX}{d}$ $\frac{B}{e}$ $\frac{1}{f}$

α =Y-RoHS

Z-RoHS(for High Temperature)

b =3-Single Row

6-Dual Row

c =Type Option

Housing Dim.H-1.5mm,2.0mm

Pin Length(Dim.A/Dim.B):

Custom Length Available

d =Amount of Pins:

Single Row:03~40-3~40Pins

Dual Row:06~80-6~80Pins









e =B-Bag

f =1-G/F Overall



Single Row
XP91-0230X-XXB1

Dual Row
XP91-0260X-XXB1

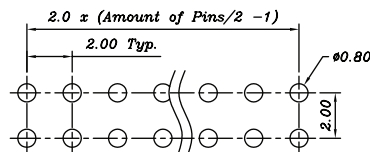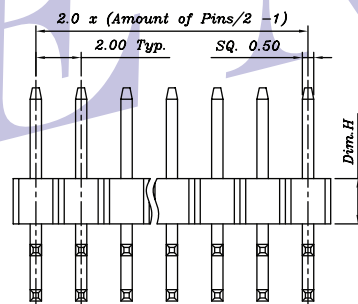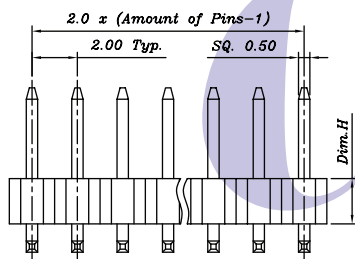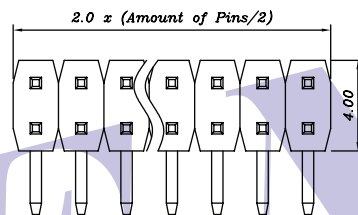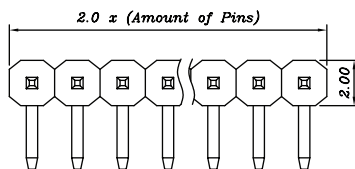

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

SPECIFICATION

Current Rating : 1A

Dielectric Withstanding : AC 500V

Operating Temperature : $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$

Note: Due to technical progress, all design, specification and components are subject to change without notice