



2.0mm PIN HEADER S/T STACK TYPE WITH CAP

ORDER INFORMATION

$\frac{X}{a}$ P91-0242 $\frac{X}{b}$ - $\frac{18}{c}$ $\frac{X}{d}$ $\frac{1}{e}$

a =Y-RoHS

Z-RoHS(for High Temperature)

b =Type Option Pin Length(Dim.A/Dim.C/Dim.B):

B-4.00mm/30.30mm/2.20mm

I-4.00mm/26.10mm/2.00mm



J-4.00mm/18.80mm/2.20mm

c =Amount of Pins:18-18Pins

d =B-Bag

1-Tube+Cap

e =1-G/F Overall

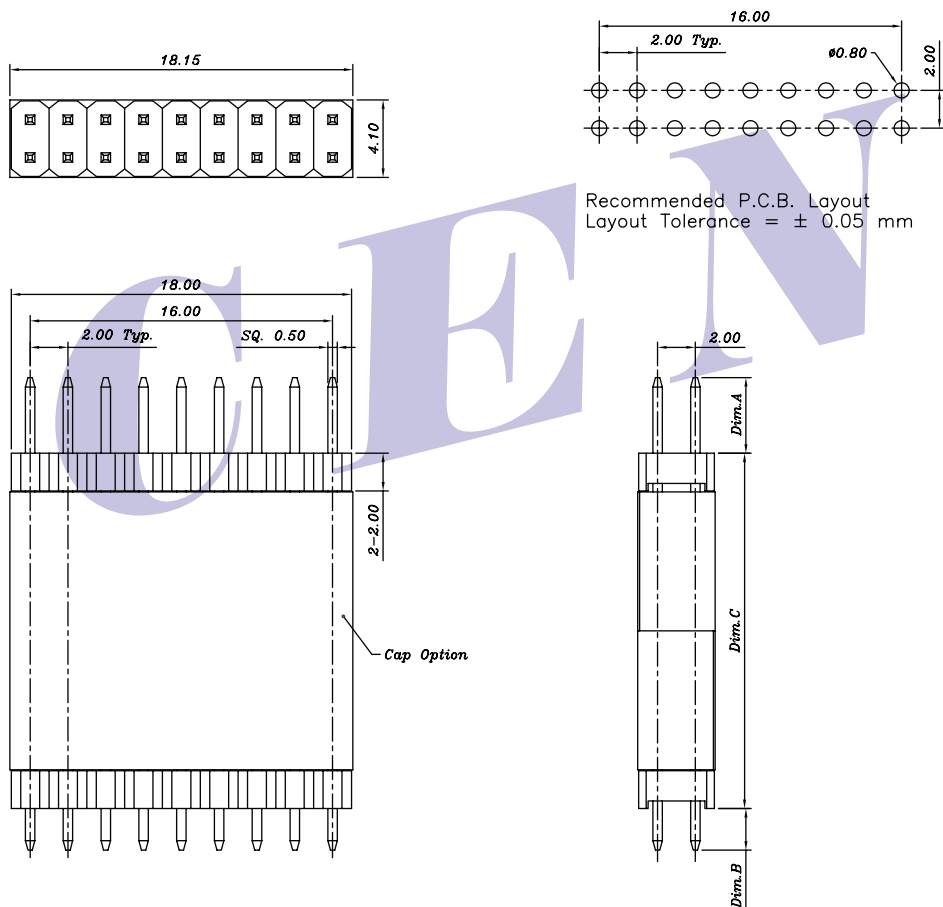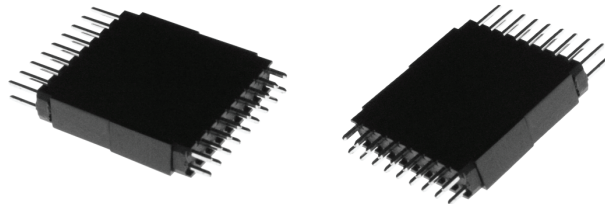

SPECIFICATION

Current Rating : 1A

Dielectric Withstanding : AC 500V

Operating Temperature : $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$

Note: Due to technical progress, all design, specification and components are subject to change without notice