



2.0mm PIN HEADER S/T TYPE QUADRI-ROW

ORDER INFORMATION

$\frac{X}{a}$ P91-0290 $\frac{X}{b}$ - $\frac{XX}{c}$ $\frac{B}{d}$ $\frac{1}{e}$

a =Y-RoHS

Z-RoHS(for High Temperature)

b =Type Option



Pin Length(Dim.A/Dim.B):

Custom Length Available



c =24~C0-24~120Pins

d =B-Bag

e =1-G/F Overall

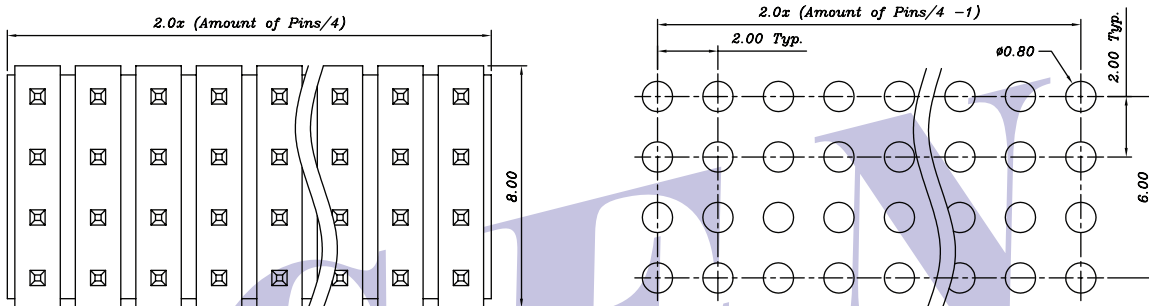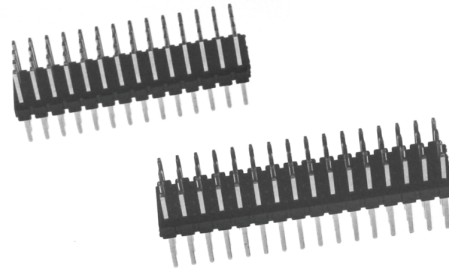

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

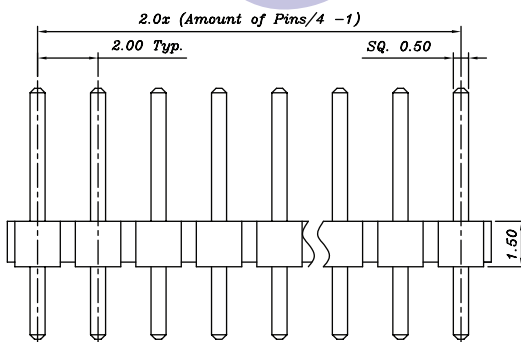

SPECIFICATION

Current Rating : 1A

Dielectric Withstanding : AC 500V

Operating Temperature : $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$

Note: Due to technical progress, all design, specification and components are subject to change without notice