

## 2.0mm BOX HEADER S/T STACK TYPE

### ORDER INFORMATION

$\frac{X}{a}$  P91-024BA-  $\frac{XX}{b}$   $\frac{Y}{c}$   $\frac{1}{d}$




$a$ =Y-RoHS

Z-RoHS(for High Temperature)



$b$ =06~80-6~80Pins

$c$ =Y-Tray

$d$ =1-G/F Overall

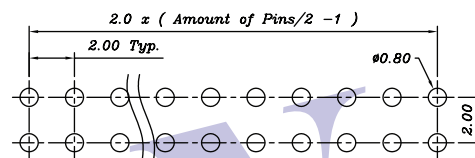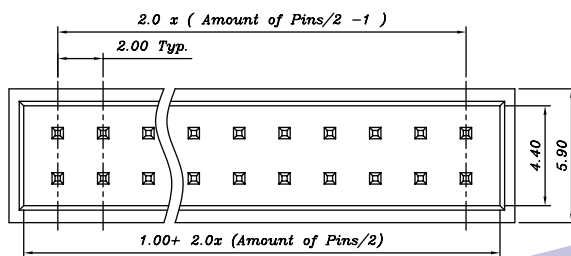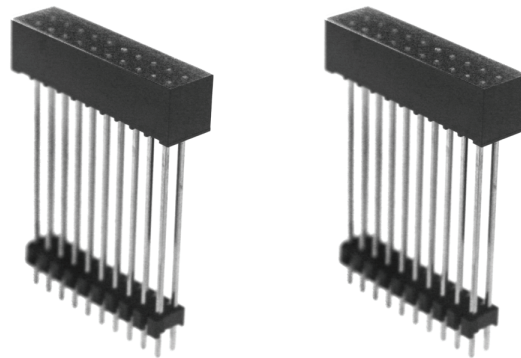

Recommended P.C.B. Layout  
Layout Tolerance =  $\pm 0.05$  mm

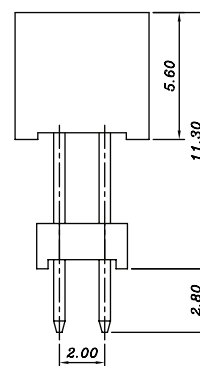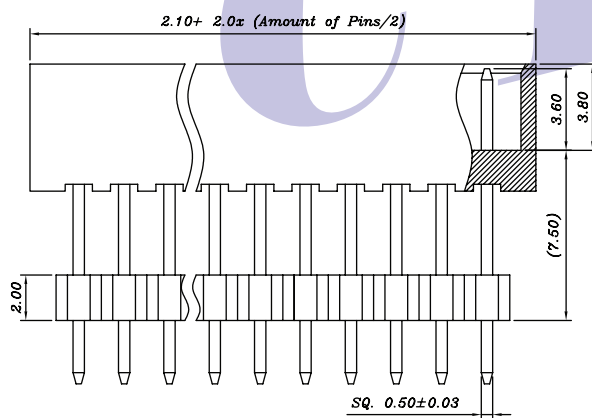

### SPECIFICATION

Current Rating : 1A

Dielectric Withstanding : AC 500V

Operating Temperature :  $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$

Note: Due to technical progress, all design, specification and components are subject to change without notice