



2.0mm BOX HEADER S/T STACK TYPE WITH CAP

ORDER INFORMATION

$\frac{X}{a}$ P91-024BH- $\frac{24}{b}$ $\frac{X}{c}$ $\frac{1}{d}$

a =Y-RoHS




Z-RoHS(for High Temperature)

b =Amount of Pins:24-24Pins



c =T-Tube

1-Tube+Cap

d =1-G/F Overall

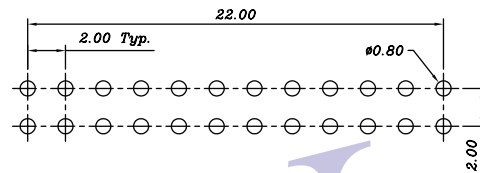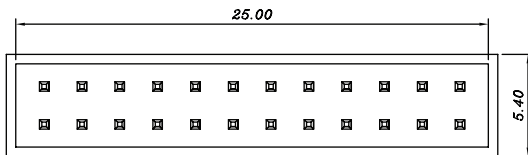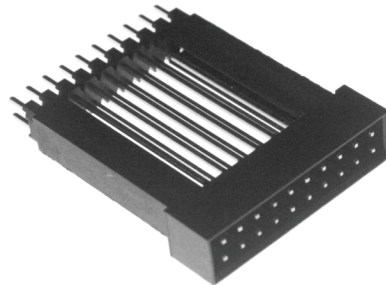

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

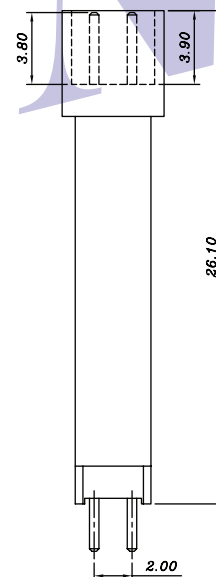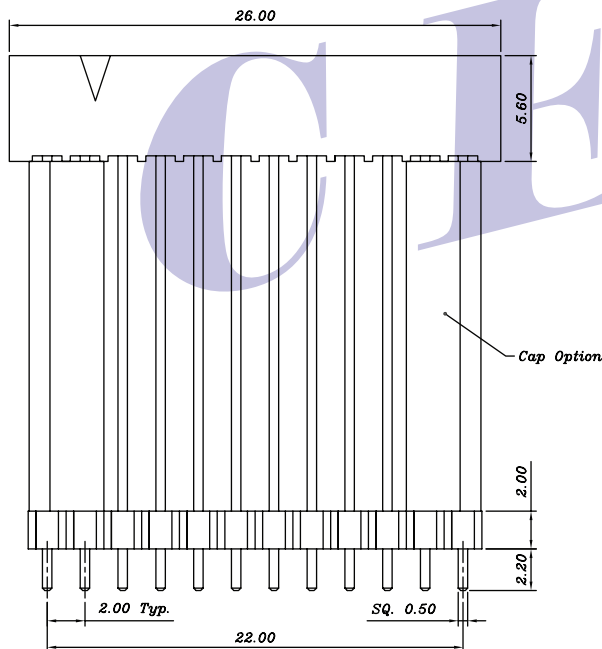

SPECIFICATION

Current Rating : 1A

Dielectric Withstanding : AC 500V

Operating Temperature : $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$

Note: Due to technical progress, all design, specification and components are subject to change without notice