








2.0mm BOX HEADER R/A TYPE WITH BOARDLOCK

ORDER INFORMATION

$\frac{TPA1-301}{a} \frac{44}{b} \frac{-01}{c} \frac{T}{d} \frac{1}{d}$

α =T-RoHS(for High Temperature)
 b =Amount of Pins:44-44Pins
 c =T-Tube
 d =1-G/F Overall

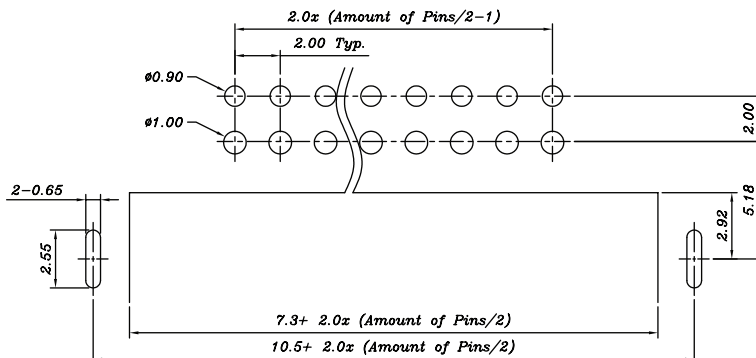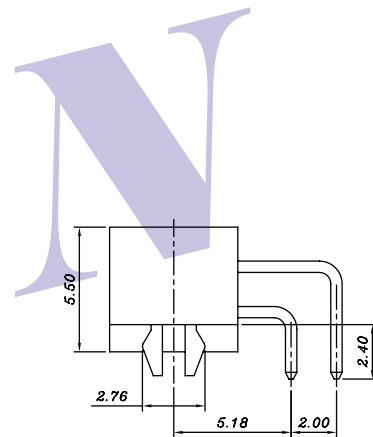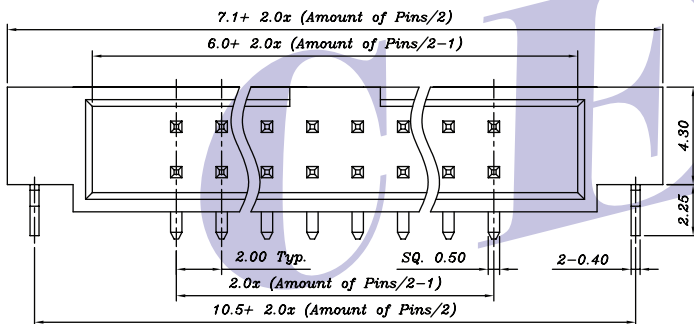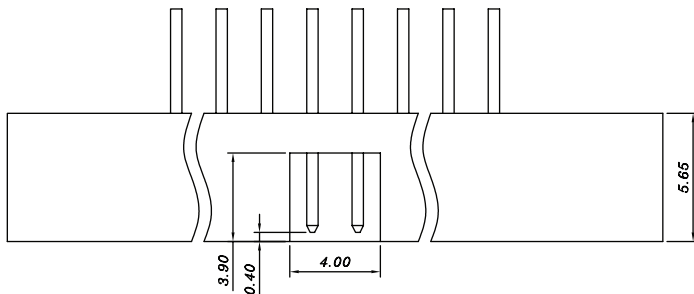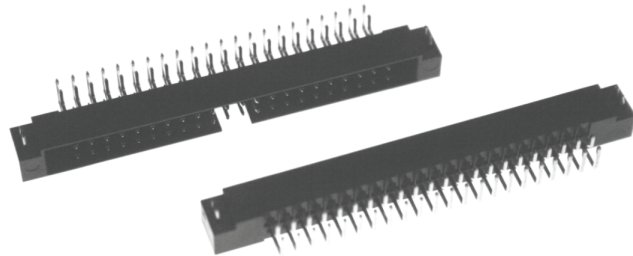

SPECIFICATION

Current Rating : 1A
 Dielectric Withstanding : AC 500V
 Operating Temperature : -40° C ~ 105° C

Recommended P.C.B. Layout
 Layout Tolerance = ± 0.05 mm

Note: Due to technical progress, all design, specification and components are subject to change without notice