
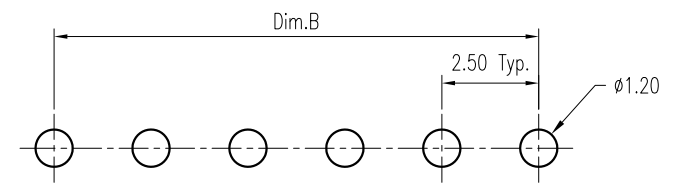
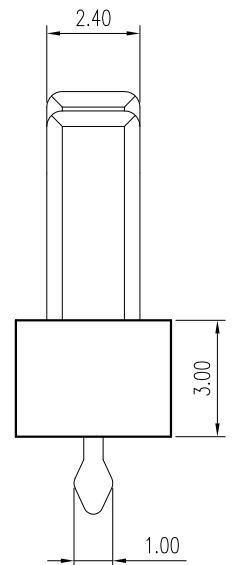
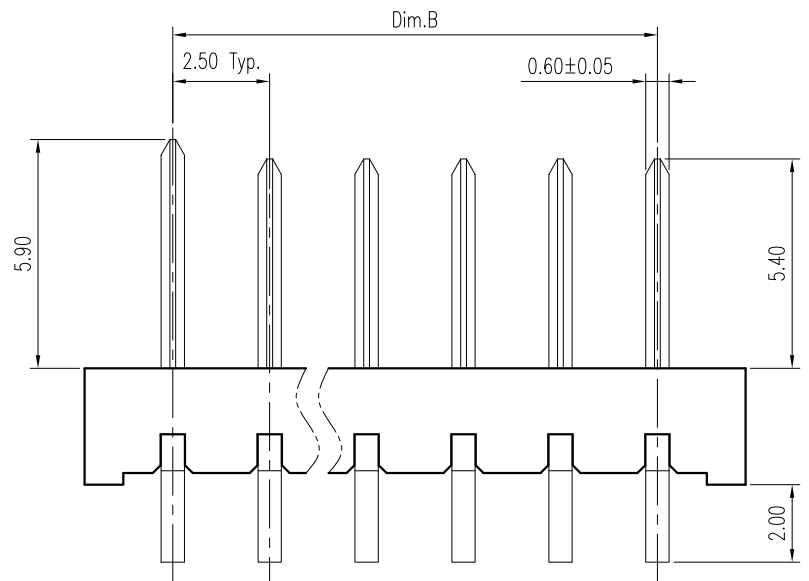


REV.	DESCRIPTION	ECN NO.	DATE	DRAWER
A	New Release		08/20/2008	Steven

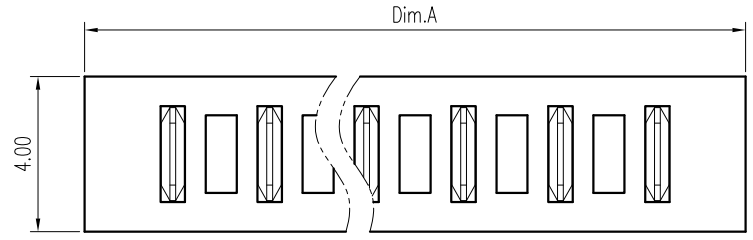

Notes:

- Material :
Housing : Thermoplastic UL 94V-0 ,Black
Terminal : Copper Alloy
- Finish :
Terminal : Selected Gold on Contact Area,
G/F on Solder Tails, Both over
50u" Min. Ni Under-plated Overall
- Order Information :

SB1-052 X 0-OHT X
T: RoHS(for High Temperature)

Amount of Pins:

- 4: 4Pins
- 2: 2
- A: 10Pins
- B: 11Pins

Plating Option:

- 2: 2u" Min. Gold on Contact Area
- 3: 5u" Min. Gold on Contact Area

Part No.	Dim. of Pins	Dim.A	Dim.B
TSB1-05240-OHTX	4	12.05	7.50
TSB1-05250-OHTX	5	14.55	10.00
TSB1-05260-OHTX	6	17.05	12.50
TSB1-05270-OHTX	7	19.55	15.00
TSB1-05280-OHTX	8	22.05	17.50
TSB1-05290-OHTX	9	24.55	20.00
TSB1-052A0-OHTX	10	27.05	22.50
TSB1-052B0-OHTX	11	29.55	25.00

DIMENSION IN mm [inch]	
Tolerance unless otherwise specified	
X.X	X.X' ± 10"
X.XX ± 0.38	X.X' ± 5"
X.XX ± 0.25	X.XX' ± 2"
X.XXX ± 0.13	X.XXX' ±

CEN 欣訊科技股份有限公司
CEN LINK CO., LTD.

Title	2.5mm Pitch Battery Conn. Male Type
Dwg No.	TSB1-052X0-OHTX
File No.	PO3015
Approver:	Checker:
Drawer:	Steven
Date:	08/20/2008

Scale:	5 : 1
Size:	A 4
Rev :	A
Sheet:	1 / 1